

Troubleshooting:

LED status	Reasons	Resolutions
Solid green light	AC and USB outputs are in normal working condition	
The red light is always on	Short-circuit protection	Plug out devices from AC outlets, restart the converter (in this case USB ports work)
Green light flashing	Low voltage of AC input	Plug out devices from AC outlets, restart the converter (in this case USB ports work)
Red light flashing	Overload protection	Plug out devices from AC outlets, restart the converter (in this case USB ports work)
Green and red light alternatively flashes	Over temperature protection or fan does not run	<ol style="list-style-type: none"> 1. Plug out your devices, wait for 3-5 minutes to restart. When the LED turns to show a solid green light, the converter will work properly. 2. If the converter doesn't work after being restarted, please wait for a few minutes until the temperature inside turns to be normal. 3. Plug out or turn off your devices, allow the fan to run for 3-5 minutes. When the LED turns to show a solid green light, the converter will work properly. 4. In this case USB ports work.
No light	Converter has no power	Connect to wall socket
	The switch button is not turned on	Turn on the switch button
	The fuse is blown	Send for inspection or repair
	USB overload protection	Stop or reduce USB charging
	USB short circuit protection	Stop USB charging

Warranty:

Our company provides customers with 18-month warranty from the date of purchase.

Contact Us:


If there is any quality-related issue or query about our product, please contact us via the Amazon buyer-seller messaging service.

BESTEK GLOBAL LLC
 1290 E ELM ST, #A-8, ONTAIRO,
 CA 91761
 COMPANY: BESTEK
 MADE IN CHINA

BESTEK

200W Travel Adapter & Power Converter

MODEL: MRJ201KU

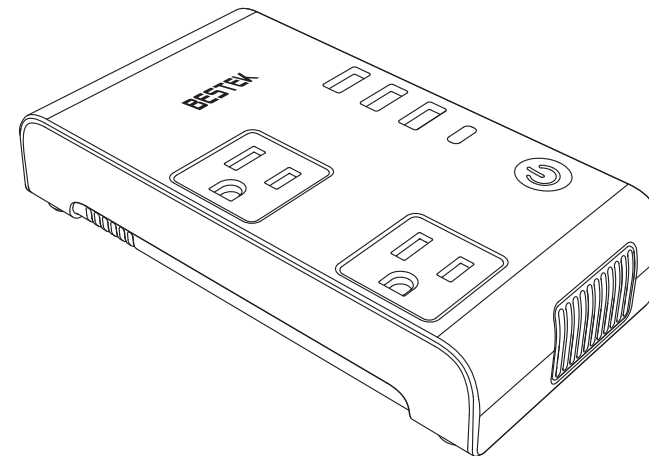

Certified As Meeting Following Standards:

UL60950-1:2007/R:2014-10
 CAN/CSA-C22.2 NO.60950-1:2007/a2:2014-10


Welcome Guide

Thank you for purchasing our BESTEK travel adapter, for safety please read this manual carefully before use.

Product Description

This product includes a cord with European plug and 3 universal plug adapters, has 2 AC outlets, 1 USB-C port and 3 smart USB ports. The input voltage range is AC 100V-240V, and any AC voltage between 100V-240V can be converted to 100-125V, and the output frequency is 60Hz. This product is for customers in the United States to use small appliances and devices when travelling worldwide (users need to choose suitable universal plug adapters according to their travel destinations), supplies power and charges mobile office, communication and emergency equipment, compatible with various brands of mobile phones, laptops, and other digital electrical products rated at less than 200W.

Parts

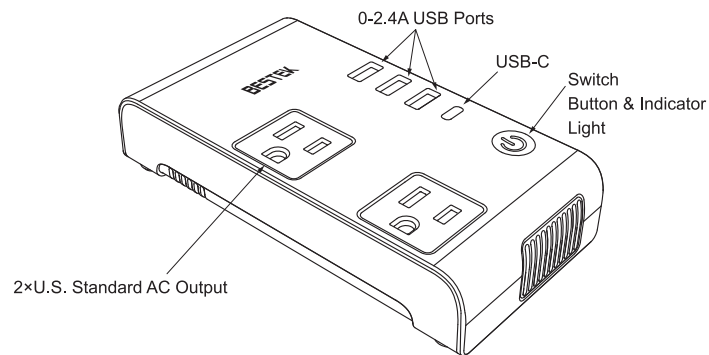

Features

1. The USB ports are equipped with intelligent identification chips, can automatically identify all kinds of mobile phones and digital products, and configure charging current to provide the most efficient charge.
2. The USB output is completely isolated from AC output to prevent your devices from being damaged.
3. This product provides overheat, overload, overcurrent and short circuit protections to ensure user's safety.
4. When overheat, overload, overcurrent or short circuit protections are activated, the power

1

supply inside the converter needs to be restarted to reset. Follow these steps: disconnect AC output when the red light is on, press the power switch, wait until the red light turns off and green light turns on before plugging in any devices.

5. The AC outputs come with short circuit protection. When a short circuit occurs in your devices, the red light will turn on, and the output will be shut off to guarantee user's safety.
6. The smart fan inside the converter increases or decreases its speed based on temperature and output power.

How To Use

1. Connect the voltage converter and universal plug adapter with the cable, then plug it into the wall socket.
2. Turn on the power button.
3. If the LED shows a solid green light, the converter will work normally, otherwise please turn to read "Troubleshooting" or contact customer service staff for help.

Specifications

		Min.	Rated	Max.	Note
Output voltage	Vac	100	115	120	Vin: 180-240Vac
		90	115	120	Vin: 100-180Vac
Output of resistive load	W	/	200	240	Vin: 180-240Vac
		/	160	200	Vin: 100-180Vac
Output of capacitive load	W	/	180	240	Vin: 180-240Vac
		/	160	200	Vin: 100-180Vac
Output frequency	Hz	57	60	63	
USB output	5V $\overline{=}$ 2.4A \times 3(Auto)				
USB-C	5V $\overline{=}$ 3A				
USB Output Power	35W(Total)				

Warnings

- ⚠ When simultaneously charging multiple devices, make sure the total wattage is less than 200W in case of over-heating or damage.
- ⚠ Please don't use this converter with appliances rated at voltage 220V-240V AC. It is only able to supply power for 100V-120V AC products.
- ⚠ Please don't use this power converter to supply power for your hair dryer, curling iron, hair straightener or coffee machine.



2