
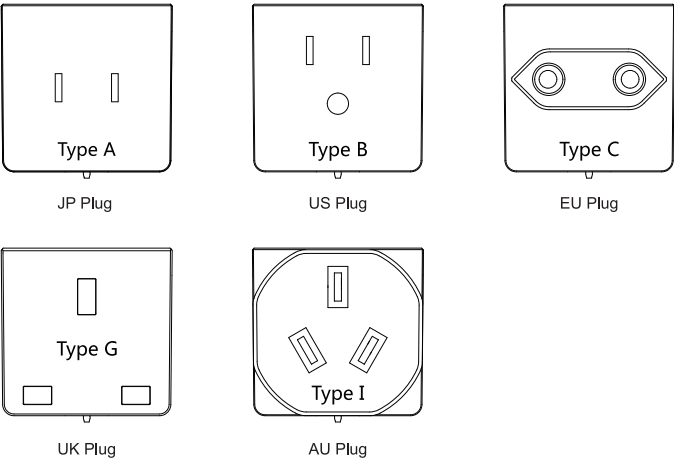


Thanks sincerely for shopping with BESTEK.
Please read the manual carefully before using it and follow the instruction strictly.

Product Description:

1. It's suitable and easy to carry for businessmen with small portable design.
2. This product comes with 1 American standard AC socket and three DC USB-A ports as well as one USB-C. With built-in communication chips, three USB-A ports can automatically identify phone types and models and match charging devices, which speeds the charging process. Meanwhile, USB-C port with PD3.0 fast charging protocol, can support Macbook, iPhone8, iPhone X, ect. In addition, it is compatible with QC3.0, supporting fast charging of those mobile phones with QC.
3. All in one adapter (UK/US/AU/EU/JP Plug) support outlets in different countries, the input voltage is equal to the output since the AC input and output are directly connected.
4. This product has over-current, over-voltage, short-circuit, overload protection function.
5. This model is made up by V0 grade fire proof PC material.
6. Built-in fuse can effectively protect other household devices from damaging when in abnormal situation.

Components:

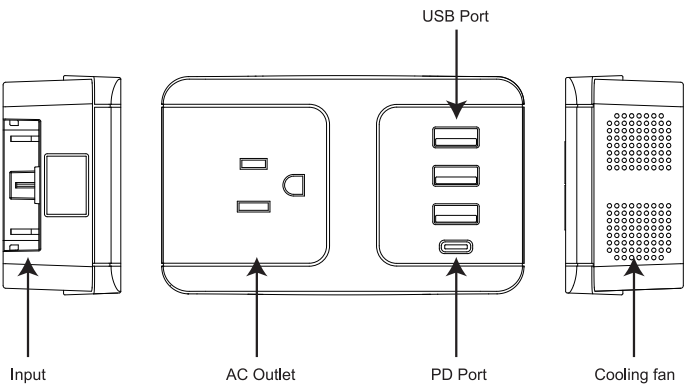

Instructions:

- 1.Connecting to the power.
- 2.Using directly after plugging into AC devices.
- 3.Charging for digital electronics and electrical products such as Macbook, Mobile phones, MP3, MP4, IPOD, PSP, GPS and etc. And Four devices can be charged quickly at the same time.

Details:

AC Output/Input	100-240V~ 50Hz/60Hz 13A Max
USB-C Output	5V/3A, 9V/3A, 12V/2.5A, 15V/2A, 20V/1.5A
	Single: 5V/0-2.4A Auto
USB-A Output	Total: 5V/4.8A (USB-C no-loaded)
	5V/2.4A (USB-C full loaded)
Total Wattage	DC: 45W (Total)

Protection Mode	USB Output over-voltage protection
	USB Output over-current protection
	USB Output short-circuit protection
	USB Output overload protection
Insulation Strength	3600Vac 50Hz 1minute ≤10mA
Socket Construction	One fixed US socket, three USB ports and one USB-C
Working Environment	Temperature: -5℃ to +40℃
	Humidity: 10% to 90%
Storage Environment	Temperature: -20℃ to +80℃
	Humidity: 5 to 95%
Size (Length×Width×Height)	4.25×2.56×1.38 inches (Body dimensions, excluding pins)
Weight	6.36 ounces

Note:

- 1) Please make sure that the total wattage is less than rated wattage when using the product.
- 2) Please keep dry and away from flammable liquid or gas, avoiding direct sunlight or high temperature places.
- 3) Please avoid using it outdoors at rainy days and do not use it after being wet.
- 4) Please keep it carefully when not in use. Do not put it in a humid environment such as a kitchen or bathroom, or in a place with direct sunlight.
- 5) When connected, do not insert your finger into the sockets or touch the product with a wet hand in case of electronic shock.

Warranty:

All BESTEK products come with a 30-day money-back guarantee for any reason, an 18 month warranty; and a lifetime of friendly customer service!

BESTEK GLOBAL LLC
1290E ELM ST, #A-8, ONTAIRO,
CA91761
COMPANY: BESTEK
Email: customers.us@bestekcorp.com